



BRICK

BRICKWEBB®

THIN BRICK SYSTEM

Installation Guide



BRICKWEBB®

Real Brick. Real Simple.

Transform Any Space with the Beauty of Brick

Brickwebb™ is the patented, revolutionary thin brick installation system that allows for quick and easy application of real brick veneer. Unlike traditional bricklaying methods, Brickwebb™ features pre-spaced, mesh-mounted brick sheets that install up to 12 times faster than standard brick by allowing multiple bricks to be placed at once. Perfect for DIYers and professionals, Brickwebb™ delivers the timeless look of real brick with minimal effort and maximum efficiency.

Why Choose Brickwebb?



Fast & Easy Installation

Lay up to 12 bricks at a time for a fraction of the labor.



Authentic Thin Brick

Made from real kiln-fired clay for a natural, durable finish.



Perfect Spacing Every Time

Pre-aligned brick spacing ensures a professional look.



Versatile Applications

Ideal for interior and exterior walls, floors, ceilings, fireplaces, backsplashes, and more.



Lightweight & Strong

Durable yet easier to handle than full-sized bricks.



Cost-Effective

Reduces installation time, labor costs, and material waste.



Installation is as Easy as 1-2-3

- 1. Apply Adhesive** – Spread thin-set or mastic on a clean, dry surface.
- 2. Press & Align** – Place Brickwebb™ sheets onto the surface, ensuring a secure bond.
- 3. Grout & Finish** – Fill joints with mortar for a seamless, authentic brick look.

Available in:



BRICKWEBB®
Running Bond



BRICKWEBB®
Herringbone



BRICKWEBB®
Corners

BRICKWEBB

INSTALLATION GUIDE

 Genuine kiln-fired clay brick mounted onto patented web sheeting for easy & fast installation, perfect spacing (no spacers required), and enhanced durability.

 Save time and money by taking advantage of Brickwebb's easy installation on virtually any surface.

 Cuts easily with an angle grinder or wet tile saw.

 Meets ASTM C1088, Type TBS, Grade Exterior standards

STEP 1

Adhesive

Apply Old Mill Modified Adhesive or modified thin set (indoor and outdoor) to surface using 3/8" x 1/4" notch trowel.



STEP 2

Brickwebb Corners

If your space includes corners, apply Brickwebb Corners. Press Firmly.



STEP 3

Brickwebb Flats

Apply Brickwebb Sheets. Press Firmly.



STEP 4

Grout

Apply Type-S mortar mix using grout bag and finish with brick jointer; or apply sanded tile grout. We recommend the use of grout release when using sanded tile grout for easier clean-up and finished look.



Available in:



OldMillBuildingProducts.com

STEP 1 Measuring

To get started on a thin brick or Brickwebb project, you will first need to know how many boxes to order. To find out how much product you need, follow these steps:

1. Measure the height and width of your surface. Calculate the square footage of the area you would like to brick. (Height X Width)
2. Multiply that number by 5-10% and add that number to your total so that you have extra in cuts and waste during install.
3. If your project includes corners, measure the length of each of your outside corners and add them together to get your total linear feet. (For example, if you have two corners on a 10-foot wall, you will need 20 linear feet of corners.)
4. Multiply the linear feet for your corners by 75%. Because the corner wraps around and covers part of the wall, you will need to subtract this number from your flat area measurement.
5. Finally, you will want to subtract the area of any windows or other obstacles in your project. To do this, find the area of the window and subtract that number from the square footage of your total area.

STEP 2 Prepping the Surface

Brickwebb can be installed on almost any surface. However, some surfaces take some prep work before getting to work on installing. For a common painted wall, there are just a few steps you'll need to take to prep the wall for your Brickwebb project.

1. Remove any outlet covers, thermostats, and other items from the wall. Use painters' tape to tape anything that you can't remove such as vents and adjacent walls.
2. Remove any baseboards and trim that are less than ½" thick. To remove a baseboard, start by scoring the caulk with a box cutter or other sharp knife.
3. Then use a pry bar and a hammer to pull the baseboard from the wall. Be gentle and do this a few times before pulling the full baseboard off so that you don't damage the wall.
4. Put down some plastic covering on the floor and secure it in place with tape to protect your floors and for easy cleanup later.
5. After sanding, go over the wall with a dry rag or duster to remove all the dust.



For a Painted Surface: Go over the wall with some 80-grit sandpaper. Use a small circle motion and go over the entire surface of the wall. You don't need to push hard; the goal is simply rough up the surface so that your adhesive improve bond.

STEP 3

Apply Brickwebb

Brickwebb sheets make installing thin brick simple and fast. All you will need is your boxes of Brickwebb, your adhesive or mastic, a $\frac{1}{4}$ " notch trowel, tile cutter, level, measuring tape, and a pencil. If you are using Brick Bond, Old Mill's pre-mixed adhesive, everything is ready to use as soon as you open the lid. If you are using Old Mill Adhesive, follow the steps on the bag to mix it.

1.If your project includes corners, install your corner pieces first starting at the top of the wall using the following steps. After the corner sheets are installed use these same steps again to install flat sheets.


2.Starting from the top of the wall, measure down at 21" increments. Mark horizontal lines on the wall using a level. Apply adhesive and thin brick section by section.

3.Use a notched trowel to apply the adhesive. Smear on the adhesive generously with the flat side first and then use the notched side to scrape off excess.

4.Apply your first sheet of Brickwebb in a top corner and then move horizontally. Press firmly on the bricks so that the adhesive comes through the webbing and adheres. Check that your section is level and adjust as needed while the adhesive is still wet.

5.Apply your next sheet overlapping the first sheet, leaving $\frac{3}{8}$ " between the bricks for grout. Repeat this process as needed.

6.Allow your Brickwebb at least 24 hours to dry before adding grout.

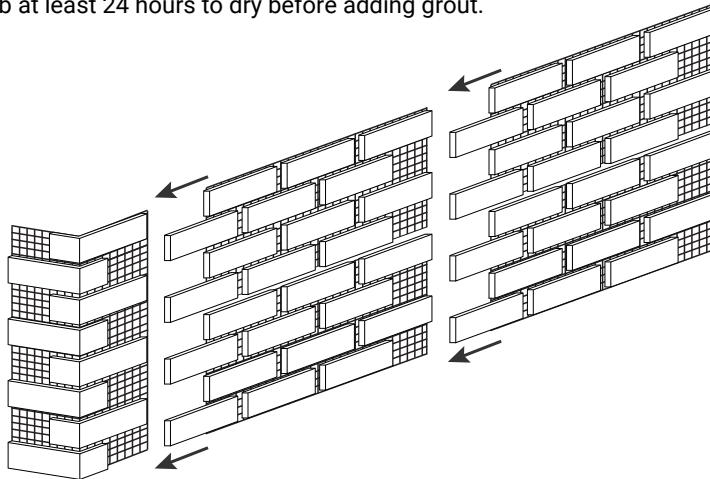

- If panel is slipping, add 2 (two) drywall screws or nails into the webbing to temporarily hold the panel in place. You can leave the screws or nails in and simply grout over.
-
- If a brick comes off the webbing, simply apply adhesive to the back of the brick and place it after the brickwebb sheet has been installed.
-
- If a brick appears to be unaligned on the Brickwebb sheet, simply pull the thin brick off the mesh, apply adhesive to the back of the brick, and re-apply in line.
-
- For edges, you can remove bricks from a sheet and cut them to size with a hand-held tile saw.

STEP **4**
**Apply
Grout**

The most traditional method and easiest way to grout your Brickwebb project is with Type S mortar mix using a grout bag and brick jointer. The traditional method reduces the amount of grout that gets on the brick face and can be used for any type of surface except flooring. For more information on other grouting methods please visit oldmillbrick.com/install.

For this step, you'll need Type S mortar mix, a grout bag, ¾" brick jointer, trowel, and a coarse natural bristle brush.

1. Mix the Type S mortar mix following the steps on the packaging.

2. Trim the end of your grout bag so that the opening is about ½" wide. Then fill your grout bag by folding down the top edge of the bag and then step on the tip of the bag. Use a trowel to fill the bag about half-way.

3. Unfold the top of the bag and hold it over your bucket of grout. Shake the back to remove bubbles and then twist until the grout starts to come out of the tip. The grout should come out when squeezed, but not be so runny that it drips out on its own.

4. Hold the grout bag with one hand in the middle and one hand at the end where it is twisted. Put the tip of the bag in the space between the bricks at a 45-degree angle. Twist the end of the bag and squeeze as you move the tip along the gap. The grout should over fill the gap just a little so that you have enough to tool later. This process takes some practice. *Do not try to wipe off excess while the grout is wet. *

5. Start at the top of your wall. Fill in sections of about 4 square feet at a time. Give each section about 15 minutes to dry. You can do about 4 sections one after the other before going back with your brick jointer. When the grout is dry enough to touch without sticking to your finger, it is ready to start tooling. It should still be soft enough to compress a little.

6. Use the heel edge of your jointer to push the mortar into the gap and away from you. The excess mortar should fall away and not stick to the brick face. If the mortar is sticking, it is still too wet and needs to set for a few more minutes. You should get clean edges with a slight indent in the grout.

7. As you use the jointer, if you come across a spot that doesn't have enough mortar, pick up some of the excess that has just fallen away from the section you are working and push it into the gap. This ensures that the mortar you add has the same level of dryness as the surrounding material.

After the grout has had some time to dry, come back and brush away any excess left on your project. Using a stiff bristle brush, start with a small section and brush the bricks with a 45-degree angle stroke. If the mortar leaves streaks on the brick faces or leaves mortar on your brush, it is still too wet, and you will need to give it more time to dry.

WANT MORE INFO?

Additional Resources

Scan the codes below for more info

Installation Video



Flooring Guide



Brick Visualizer



Shop Colors




Contact Us






BRICKWEBB DETAIL

SYSTEM ASSEMBLY

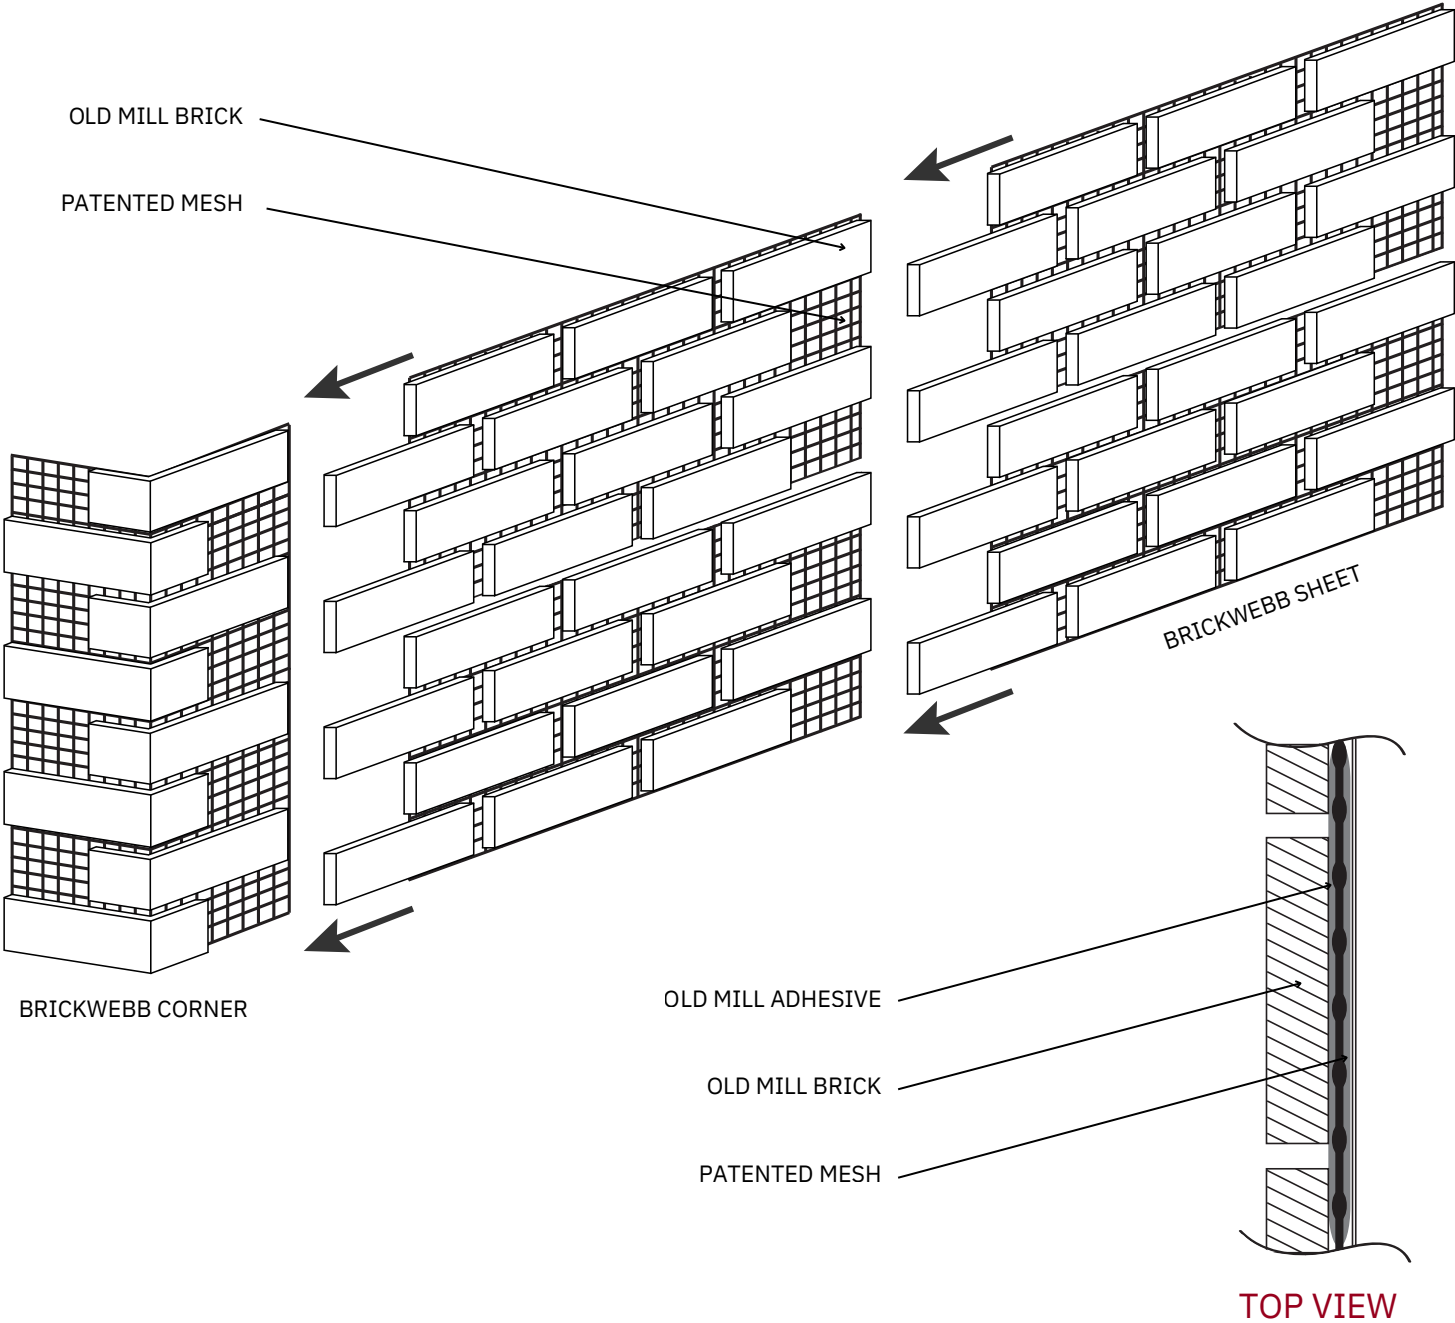

Installation System Assemblies

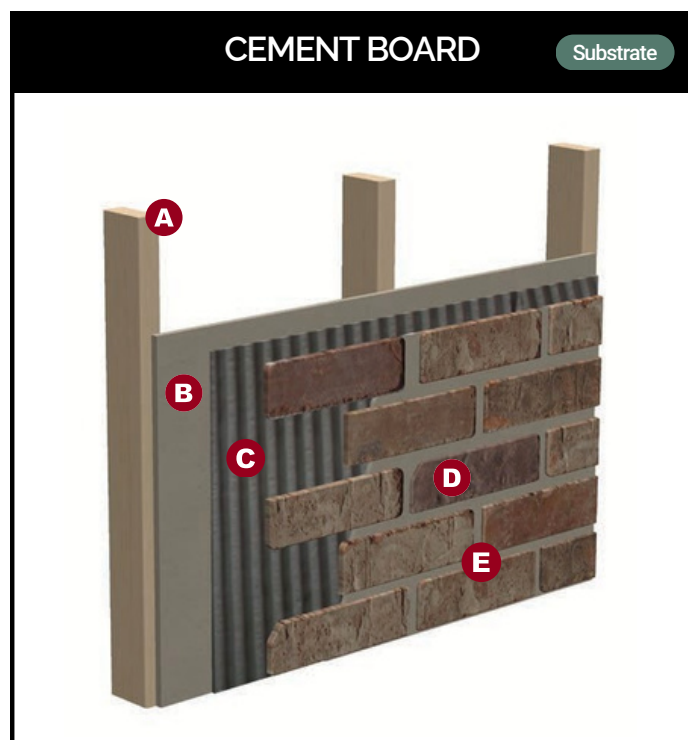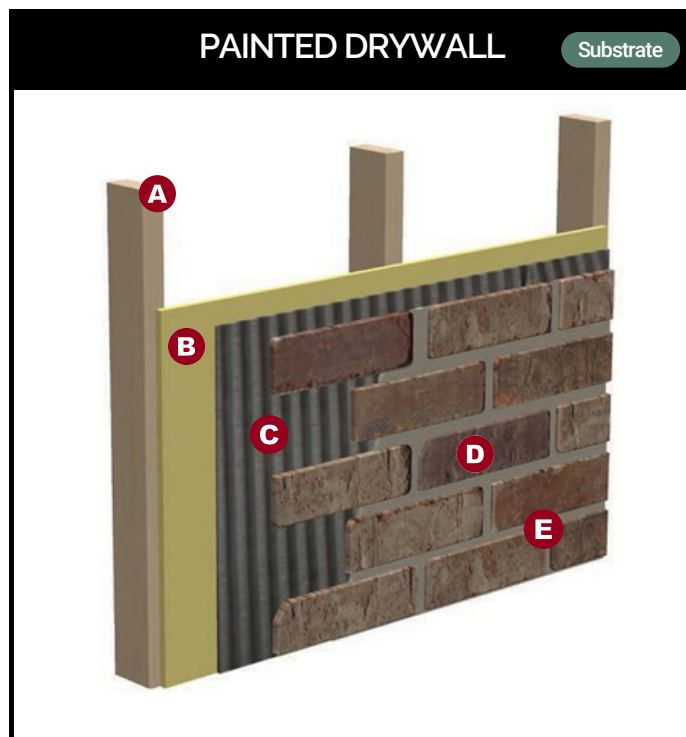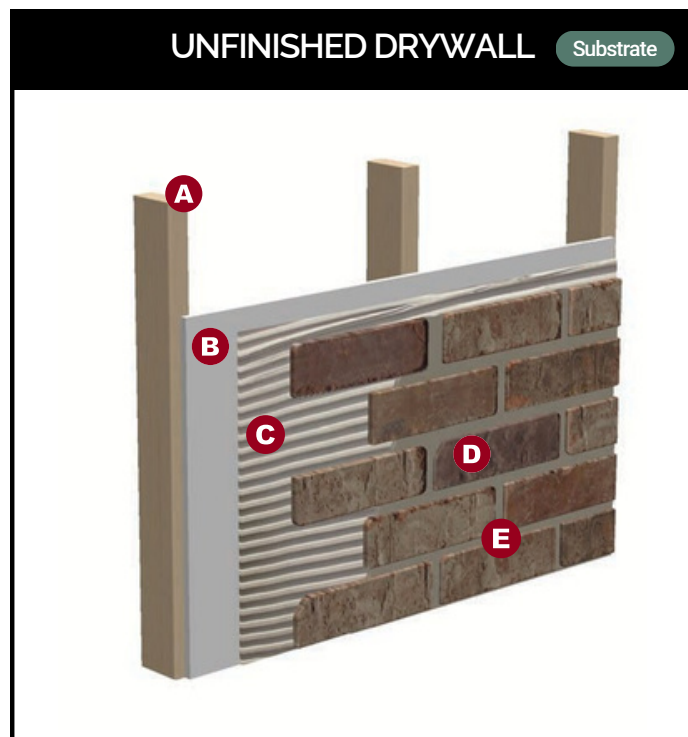




Legend

A Framing
B Substrate

C Old Mill Adhesive
D Old Mill Brickwebb

E Pointing Mortar

Installation System Assemblies (continued)

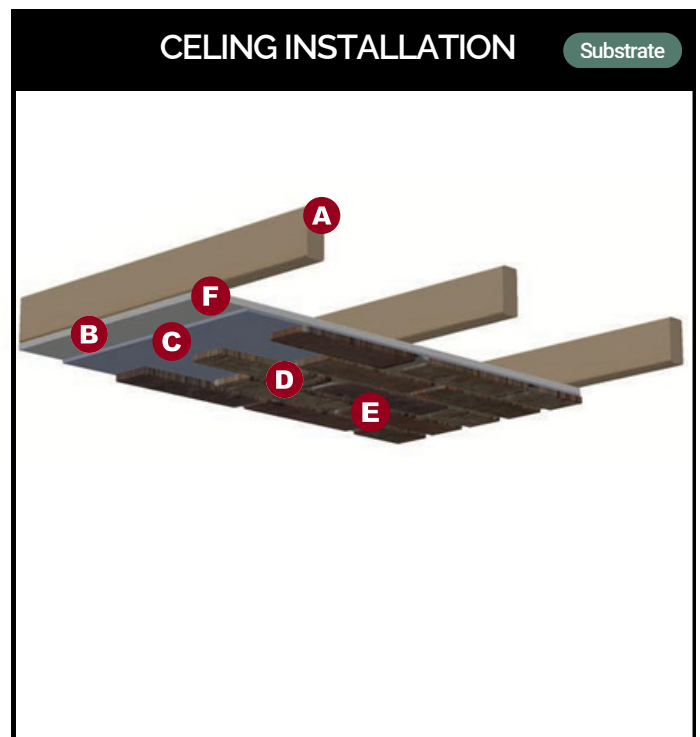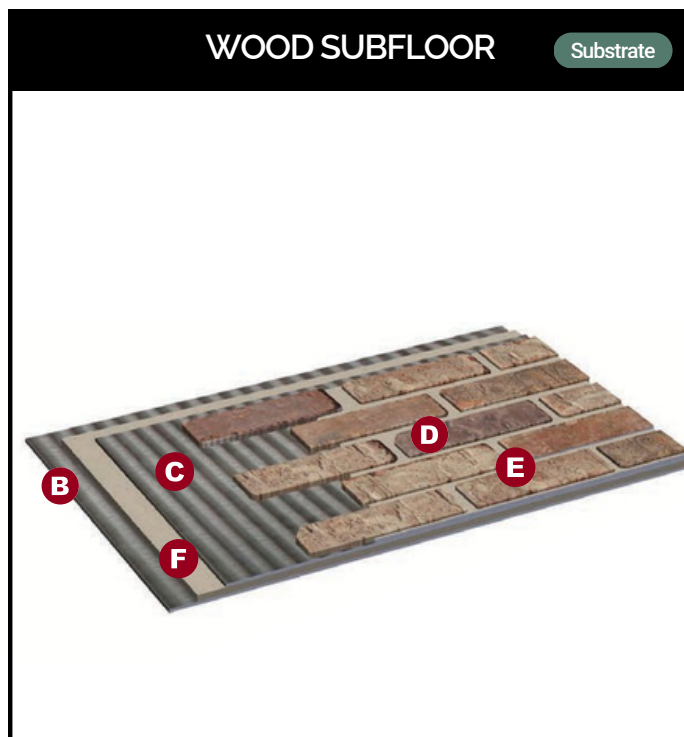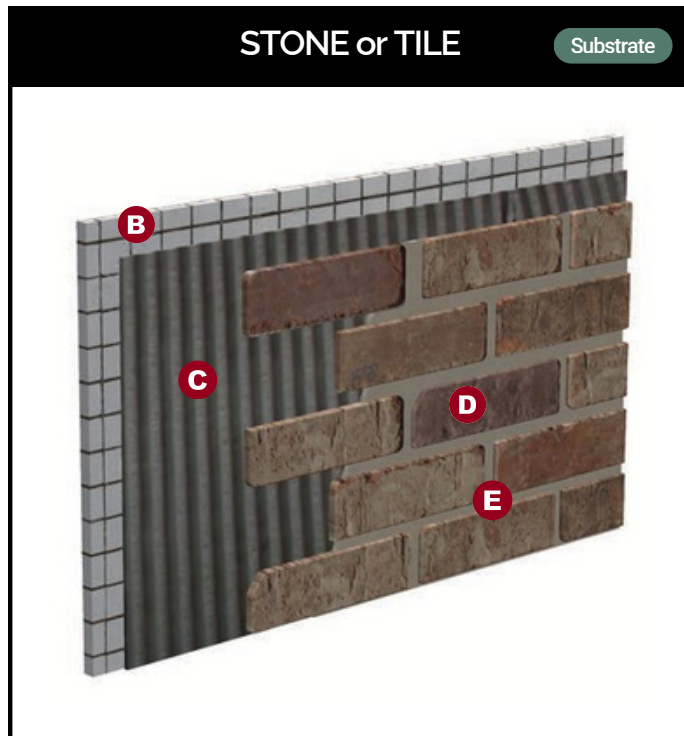




Legend

A Framing
B Substrate

C Old Mill Adhesive
D Old Mill Brickwebb

E Pointing Mortar
F Cement Board

Installation System Assemblies (continued)

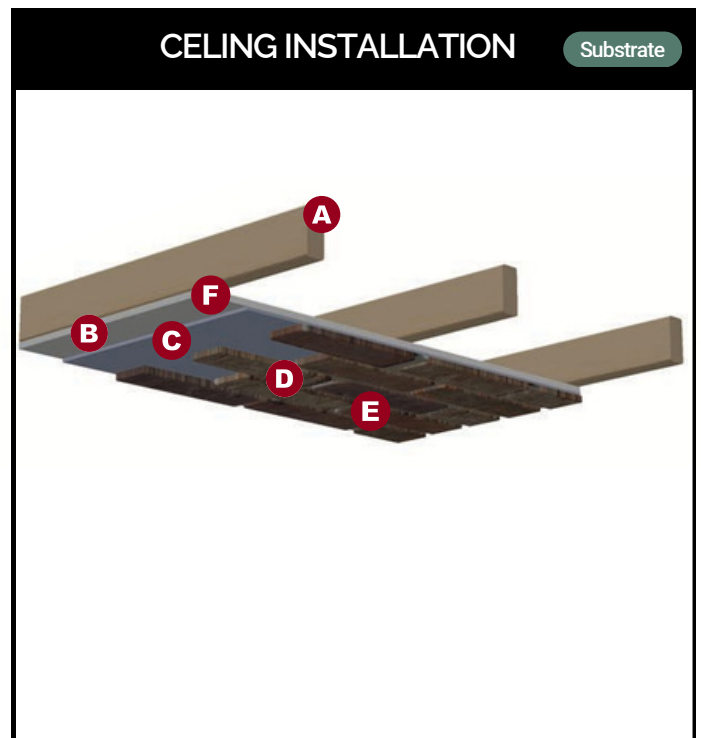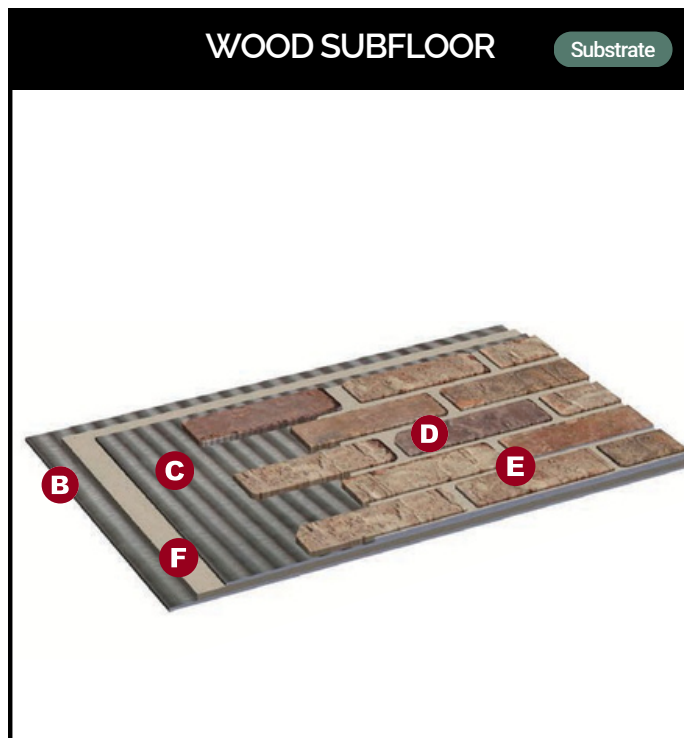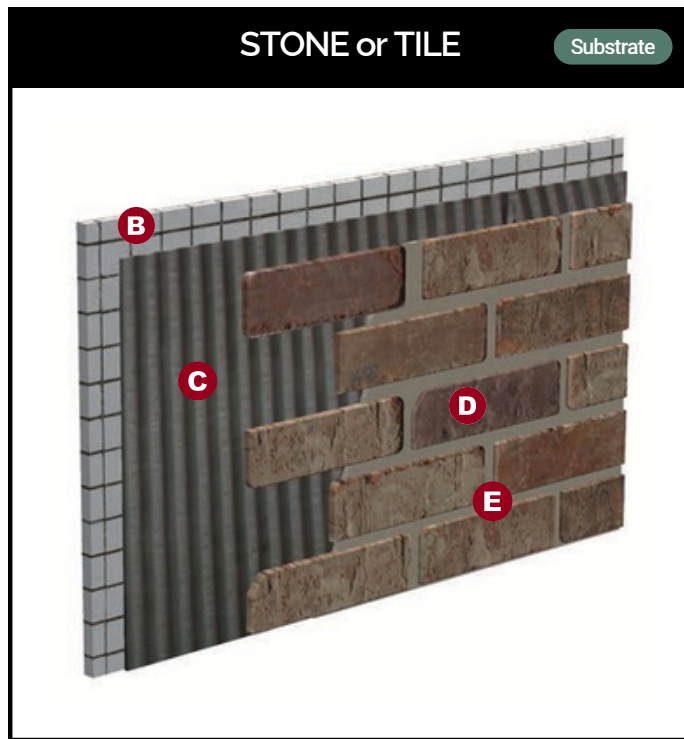

Legend

A Framing
B Substrate

C Old Mill Adhesive
D Old Mill Brickwebb

E Pointing Mortar
F Cement Board

FAQs

Frequently Asked Questions



Can I Remove a Brick From the Webbed Sheet?

The thin brick is glued onto the fiberglass mesh. You can easily remove single brick from the webbed sheeting by simply pulling them off. You may need to do this for individual brick cutting or custom brick placement. The Brickwebb fiberglass mesh can be cut using a utility knife or heavy duty scissors or tin snips.



What Type of Surface Can I Place Brickwebb?

Brickwebb thin brick can be used on virtually any surface including drywall, painted or unpainted walls, plaster walls, backer board, hardie backer, cement walls or floor, wood (with special polymer fortified thin-set adhesive) and more. The type of adhesive to best use will vary based on where you are placing Brickwebb. See what type of adhesive to use above.



Can I Use Brickwebb Around My Fireplace or Stove?

Yes, Brickwebb can be used around a fireplace or stove including the walls and floors. The brick is a kiln fired clay brick which is heated at over 2,000 degrees, so it will tolerate extreme heat or cold. Brickwebb is made from non-combustible materials so it is ideal for fireplace, stove, and oven surrounds. Verify the proper space requirements with your stove or fireplace manufacturer. Consult a building professional and check your local building codes.



Where Can I Install Brickwebb Thin Brick?

Places to use thin brick are virtually endless both interior and exterior. Some ideas where to use Brickwebb include: fireplace or stove surrounds, accent walls, columns, kitchen or bath back-splash, flooring (on a solid surface such as concrete, backer board, etc.), chimney, exterior siding, kitchen islands, bed headboards, wine cellars, man caves, porch or stairs, table tops, outdoor BBQ or kitchen, home exteriors, accent walls, and more.

If you have an idea where you have used or want to use Brickwebb Thin Brick let us know and we can help you with the best way to apply Brickwebb.



Is Brickwebb Designed for Interior and Exterior Uses?

Brickwebb is designed for both interior and exterior applications. It will withstand the outdoors elements as well as add beauty and value to the interior or exterior of your home. There are no additional structural requirements for Brickwebb and most standard walls will easily support the light weight of Brickwebb thin brick.



How Do I Grout Brickwebb?

You can use type "S" mortar to grout your brick once installed. Many people also use a standard sanded tile grout so they can pick a particular color and get a smoother finish.

*NOTE: Do not use type "S" or type "N" mortar to adhere Brickwebb to your surface. Only use these for mortar options. See question above on how to adhere Brickwebb.



What Should I Do for Inside Corners?

Inside corners do not require corner brick. Simply cut the flat brick to size and grout the inside corner.

FAQs *(Continued)*



Can I Paint Brickwebb?

Yes, you can paint the Brickwebb by first using a primer such as "Kills" and then apply the paint you want. You may also use a cement stain or release agent to customize the look you want.



Can I Apply a Sealant To Brickwebb?

Yes, you can apply a sealant to Brickwebb. By applying a "flat" standard brick or cement sealant for projects such as back splashes etc., it will make the brick and grout easier to clean. Please keep in mind that it may affect the brick color (may darken) so try a small sample before applying it to your entire project. A sealant may also bring out the color variations in the brick for a more defined and diverse look and feel.



What is the Difference Between Brickwebb's Brick vs. Cement or Cast Brick?

Strength Comparison

Brickwebb Clay Brick units are 2 ½ to 3 times stronger than concrete or cast brick.

Clay Brick – average compressive strengths typically range from 8,000 to 10,000 psi

Concrete Brick – average compressive strengths typically range from 3,000 to 4,000 psi.

Moisture Absorption

In simple terms, Concrete or Cast Brick absorbs approximately 2-3 times more moisture in the same amount of time than does Brickwebb Clay Brick, therefore Brickwebb resists moisture better. This is a great benefit if you live in a moist climate or have freeze-thaw cycles.

If you examine the walls of clay brick and concrete brick buildings after heavy rains you will note concrete brick walls can stay damp for days after a rain. More moisture penetration makes brick extra vulnerable to freeze/thaw cycles, therefore concrete brick deteriorates much faster and is more likely to crack or break than Brickwebb Clay Brick.

*NOTE: Compare Initial Rate of Absorption (IRA) – products in natural state.

Clay Brick absorbs approximately 15-35 grams of moisture per minute per 30 sq. in.

Concrete Brick absorbs between 40 and 80 grams per minute per 30 sq. in.

Concrete Brick- (Reference ASTM Standard C55 Standard Specification for Concrete Brick)

Definition: A concrete masonry unit made from Portland cement, water, and suitable aggregates, with or without the inclusion of other materials.

Clay Brick- (Reference ASTM Standard C 216 Standard Specification for Facing Brick - Solid Masonry Units Made from Clay or Shale)

Definition: A solid masonry unit made of clay or shale formed or extruded into a rectangular prism while plastic and then fired at high temperatures (up to 2000°F) in a kiln oven. Clay or shale brick is a ceramic product.



How Strong Is Brickwebb Once It Is Installed?

Independent laboratories conducted numerous tests on Brickwebb. In "shear tests" or pull out tests, Brickwebb will stay adhered to most surfaces up to a 2,000 lb pull per brick (130 psi) when adhering Brickwebb directions are followed correctly.

Compression strengths range from 8,000 to 10,000 lbs psi making Brickwebb 200% stronger than concrete or cast brick.

BRICKWEBB®

A new spin on thin brick.

Our patented Brickwebb system removes the hassle, cost and time-sink of traditional brick installation methods. With pre-installed authentic thin brick, your space will be transformed in no time. Place brick better with Brickwebb.





PHONE :

(888) 264-6455



ADDRESS :

42 E 1100 S, Ste 6, American Fork, UT 84003



WEBSITE :

www.oldmillbuildingproducts.com



PRODUCT DATA SHEET

BRICKWEBB™ Thin Brick System

Patented Mesh-Mounted Thin Brick Panel System

COLOR

Wide variety of colors and textures available.

PACKAGING

Brickwebb Running Bond & Herringbone Variation 1

- 5 sheets per box (12 bricks/sheet)
- Coverage: 8.7 sq. ft.
- Total: 60 thin bricks
- Grout spacing: 3/8 in.
- Weight: 40 lbs per box

Variation 2 (thicker thin brick)

- 4 sheets per box (12 bricks/sheet)
- Coverage: 7 sq. ft.
- Total: 48 thin bricks
- Grout spacing: 3/8 in.
- Weight: 40 lbs per box

Brickwebb Corners

- 3 sheets per box (8 corners/sheet)
- Coverage: 5.3 linear ft.
- Total: 24 thin bricks
- Weight: 25 lbs per box

THIN BRICK UNITS

- Made from clay or shale, fired at high temperatures to achieve severe-weathering durability.
- Thickness: approx. 1/2 in. (12–13 mm) after cutting.
- Dimensions: 2 1/4 in. (height) × 7 5/8 in. (length).
- Shapes: standard flats and corner units available.
- Weight: less than 15 psf (pounds per square foot)

MESH BACKING

- Woven fiberglass mesh, coated for durability.
- Provides consistent spacing and alignment.
- Complies with OSHA and WHMIS safety classifications; non-hazardous as an installed article

DESCRIPTION

Brickwebb™ is Old Mill's patented thin brick installation system. It combines genuine kiln-fired thin clay brick units with a factory-mounted fiberglass mesh backing (manufactured by Saint-Gobain Adfors). This pre-mounted system allows up to 12 bricks to be installed at once, reducing time, labor, and alignment issues compared to traditional brick installation methods.

Brickwebb is suitable for both interior and exterior adhered masonry applications in residential, commercial, and institutional projects.

USES

Brickwebb™ is designed for adhered thin brick applications in both interior and exterior settings, including:

- Residential, commercial, and institutional projects.
- Accent walls, feature walls, and fireplace surrounds.
- Full building facades and exterior cladding above grade.
- Remodels where lightweight veneer is required.
- Substrates such as drywall, plywood, cement board, concrete, and CMU.
- New construction or retrofit projects where reduced weight and faster installation are beneficial.

ADVANTAGES

Installs up to 12 bricks at a time using patented mesh system.

Saves labor and cost vs. traditional brick.

Made from 100% real kiln-fired clay brick.

Lightweight (<15 psf) for walls without structural reinforcement.

Consistent spacing, no spacers required.

Severe-weathering classification per ASTM.

Fire resistance – Rated up to 4 hours depending on assembly design.

Fire-resistant up to 4 hours depending on assembly.

Versatile installation for walls, ceilings, floors in both residential and commercial spaces.

BRICKWEBB SYSTEM PRODUCTS



BRICKWEBB®
Running Bond



BRICKWEBB®
Herringbone



BRICKWEBB®
Corners


TECHNICAL INFORMATION

TEST	METHOD	RESULTS
Compressive Strength (Thin Brick Units)	ASTM C67	> 3,000 psi
Water Absorption	ASTM C1088	Meets Severe-Weathering classification
Freeze-Thaw Durability	ASTM C67	Resistant; no failure after cyclic testing
Weathering Classification	ASTM C1088	Severe-weathering
Bond Strength (Adhered Veneer)	ANSI A118.4 / ASTM C270	≥ 50 psi shear strength
Fire Resistance (System Assembly)	ASTM E119	1–4 hours depending on wall design/thickness
Fiberglass Mesh Weight	ASTM D-3776	15.5 oz/yd ² (525 g/m ²)
Fiberglass Mesh Thickness	ASTM D-1777	0.039 in. (1.0 mm)
Fiberglass Mesh Tensile Strength – Warp	ASTM D-5035	640 lb/in (2850 N/2.54 cm)
Fiberglass Mesh Tensile Strength – Weft	ASTM D-5035	645 lb/in (2860 N/2.54 cm)
Fiberglass Mesh Construction	Internal QC / ASTM D-3775	Leno weave; 4.2 warp yarns/in., 4.4 weft yarns/in.
Fiberglass Mesh Finish	Manufacturer test	Alkali-resistant coating; stable in heat/moisture exposure

BRICKWEBB™ meets or exceeds ASTM C1088 (Type TBS, Grade Exterior) requirements for thin brick veneer units and complies with applicable ASTM, ANSI, TMS, and IBC standards for adhered thin brick masonry construction.

APPLICABLE STANDARDS

ASTM C67	ASTM C652	ASTM D-3776	ASTM D-3775	TMS 402 / ACI 530
ASTM C1088	ASTM C270	ASTM D-1777	ASTM E84	BIA Tech 3A, 8, 20, 28C, 46
ASTM C216	ASTM E119	ASTM D-5035	ANSI A118.4	International Building Code (IBC)

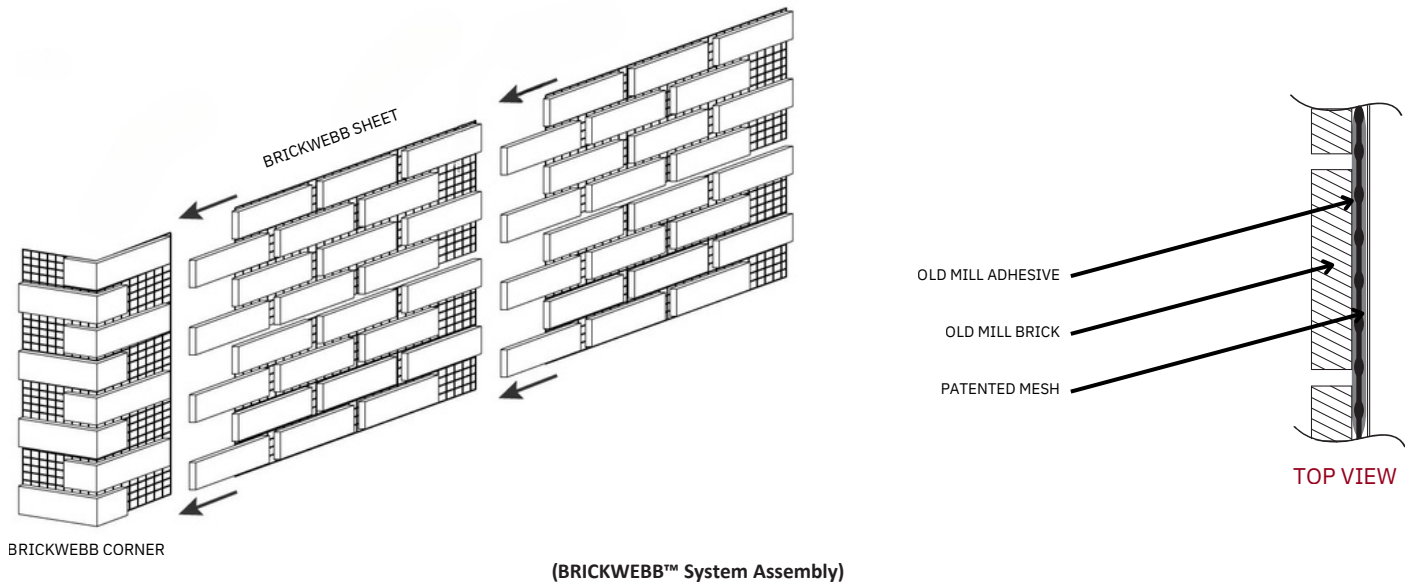

COMPOSITION AND MATERIAL

Thin Brick Units:

- Manufactured from clay, shale, or similar natural materials.
- Kiln-fired to achieve severe-weathering durability.
- Cut to approximately ½ in. thickness.

Fiberglass Mesh Backing:

- Woven fiberglass fabric in a leno weave.
- Provides tensile strength, dimensional stability, and chemical/moisture resistance.
- Lightweight, uniform, and flexible, designed for consistent spacing and grout alignment.

SHAPES & SIZES

Standard Modular Face Size: 2¼ in. (H) × 7⅞ in. (L).

Available Shapes:

- Stretcher (flat)
- 90° cut corner units
- System Weight: ≤ 15 psf (all Brickwebb products).

LIMITATIONS

Not recommended for:

- Below-grade installations.
- Horizontal exterior applications (e.g., paving, flooring).
- Continuous water immersion or exposure to de-icing salts.
- Units are absorptive; proper flashing, drainage, and waterproofing required.

HANDLING & STORAGE

- Deliver in protective packaging.
- Store 3 in. above grade, covered if outdoors.
- Protect edges, corners, and finishes from staining or damage.
- Do not handle or install below 50 °F.
- If stored in below 50 °F, allow for product to warm to room temperature before applying. May fall free from mesh if too cold.

SAFETY

- Thin bricks are kiln-fired and non-combustible.
- Fiberglass mesh may cause irritation if cut or abraded; wear gloves, safety glasses, and dust mask when handling/cutting.
- Store dry, off the ground, protected from moisture and staining

INSTALLATION

1. Install per ACI 530 / TMS 402 and local building codes.
2. Substrate must be clean, dry, structurally sound.
3. Apply modified thin-set or polymer-fortified adhesive using 3/8 in. notched trowel.
4. Press Brickwebb sheets firmly into adhesive. Install corners first, then flats.
5. Allow adhesive to cure 24 hours before grouting.
6. Grout with Type S mortar or sanded grout, then tool joints.
7. Flooring: install over concrete or cement board underlayment; seal after curing.
8. Reference BIA Technical Notes 3A, 8, 20, and 28C for guidance

Measuring:

Calculate square footage and add 5–10% for cuts and waste. Order additional if corners are required.

SURFACE PREPARATION

- Substrate must be clean, dry, structurally sound, and free of contaminants.
- For painted drywall, scuff-sand with 80-grit sandpaper.
- For masonry or concrete, clean with wire brush and repair defects.
- For wood subfloors, install a cement board underlayment for stability.

ADHESIVE APPLICATION

- Apply Old Mill Brick Adhesive (or modified thin-set mortar) using a 3/8 in. × 1/4 in. notched trowel.
- Spread adhesive evenly across the substrate.

APPLICATION

- Start at the bottom corner and work upward.
- Press Brickwebb sheets firmly into adhesive, aligning mesh to maintain consistent spacing.
- For corners, install Brickwebb Corner sheets first, then infill with flat sheets.
- Trim sheets as needed with utility knife, wet saw, or grinder.

GROUTING

- Allow adhesive to cure at least 24 hours.
- Fill joints with Type S mortar or approved grout using a grout bag.
- Tool joints with a concave jointer for proper finish.
- Brush away excess mortar with a stiff-bristle brush.

FLOORING INSTALLATION (WOOD or CONCRETE)

Wood subfloors:

Install cement board underlayment, secure, then apply adhesive, set Brickwebb sheets, and grout.

Concrete floors:

Apply adhesive directly to concrete, set Brickwebb sheets, and grout.

Seal thin brick floors after installation to improve durability, stain resistance, and ease of maintenance.

WOOD SUBFLOORS

- Install a cement backer board (CBU) or fiber cement board over the plywood subfloor.
- Embed boards in a thin mortar bed, fasten with corrosion-resistant screws, and tape joints with alkali-resistant fiberglass mesh tape.
- Leave 1/8 in. perimeter gaps for movement, concealed under trim or filled with backer rod and sealant.
- Apply polymer-modified thin-set adhesive with a 3/8 in. notched trowel.
- Set Brickwebb sheets into the adhesive, pressing firmly to achieve full coverage.
- After curing, grout joints with Type S mortar or sanded grout.

CONCRETE FLOORS

- Concrete slabs must cure at least 28 days and be free of coatings, curing compounds, or contaminants.
- For crack isolation or moisture protection, apply a membrane per ANSI A118.10 or A118.12 before setting brick.
- Spread polymer-modified thin-set adhesive with a 3/8 in. notched trowel.
- Press Brickwebb sheets into adhesive, maintaining 3/8 in. grout joints.
- Allow to cure, then grout and tool joints.

FINISHING

- Clean excess mortar during installation; avoid letting smears harden on brick surfaces.
- Tool joints when thumbprint hard; a concave profile is preferred for durability.
- Seal thin brick floors after curing with a breathable, penetrating sealer (silane/siloxane-based) to improve durability, stain resistance, and ease of maintenance.

CLEANING & MAINTENANCE

- Clean excess mortar during installation with a stiff brush.
- Remove excess mortar as you work; do not allow it to dry on the brick face.
- For floors, sweep regularly; deep clean once or twice annually with oxygen bleach solution.
- Use only masonry-safe cleaners; avoid harsh acid-based cleaners which may darken or damage the surface.
- Inspect periodically for mortar joint wear and repoint if necessary
- Follow BIA Technical Note 20 for cleaning brickwork.
- Test all cleaning agents on a sample area before full use.
- Optional sealants or repellents should be breathable and approved for clay brick (see BIA Tech Notes 6 and 6A)

TECHNICAL SUPPORT

Tech Services: 1-888-264-6455
Web: oldmillbuildingproducts.com
Manufactured in the USA

WARRANTY

Covered by Old Mill Building Products' 1-Year Limited Warranty against manufacturing defects.

Warranty excludes improper installation, substrate failure, structural movement, efflorescence, and normal color variations.

For full terms and to request warranty registration, contact Old Mill Building Products or visit OldMillBuildingProducts.com.

RELATED REFERENCES

- BIA Technical Notes 3A, 8, 20, 28C, 46.
- ASTM Standards C1088, C67, C270.
- Old Mill installation guides and bulletins (available online).

REVISION HISTORY

Version: v2025-08-20 (supersedes prior editions). Data subject to change without notice.